


Parameter Value	JGS1
Maximum Size	<Φ200mm
Transmission Range (Medium transmission ratio)	0.17~2.10um (Tavg>90%)
OH- Content	1200 ppm
Fluorescence (ex 254nm)	Virtually Free
Impurity Content	5 ppm
Birefringence Constant	2-4 nm/cm
Melting Method	Synthetic CVD
Applications	Laser substrate: Window, lens, prism, mirror...

#### Same properties

Density	2.20g/cm3		
Abbe Constant	67.6		
Refractive Index (nd) at 588nm	1.4586		
Wavelength (um)	Refractive Index (n)	Wavelength (um)	Refractive Index (n)
0.200	1.55051	1.000	1.45042
0.220	1.52845	1.064	1.44962
0.250	1.50745	1.100	1.44920
0.300	1.48779	1.200	1.44805
0.320	1.48274	1.300	1.44692
0.360	1.47529	1.500	1.4462
0.400	1.47012	1.600	1.44342
0.450	1.46557	1.700	1.44217
0.488	1.46302	1.800	1.44087
0.500	1.46233	1.900	1.43951
0.550	1.46008	2.000	1.43809
0.588	1.45860	2.200	1.43501
0.600	1.45804	2.400	1.43163
0.633	1.45702	2.600	1.42789
0.650	1.45653	2.800	1.42377
0.700	1.45529	3.000	1.41925
0.750	1.45424	3.200	1.41427
0.800	1.45332	3.370	1.40990
0.850	1.45250	3.507	1.40566
0.900	1.45175	3.707	1.39936

Transmission Curve

See below

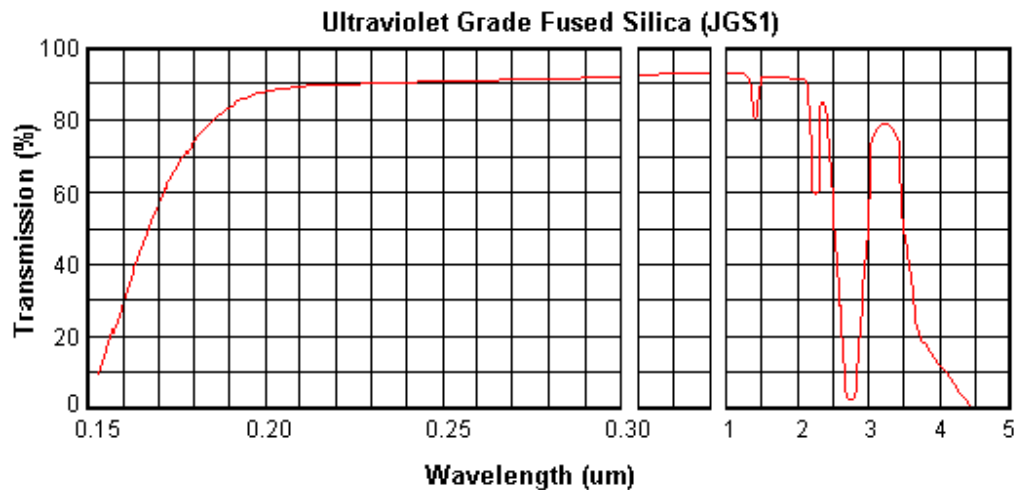

Hardness	5.5 - 6.5 Mohs' Scale 570 KHN 100
Design Tensile Strength	4.8x10 <sup>7</sup> Pa (N/mm <sup>2</sup> ) (7000 psi)
Design Compressive Strength	Greater than 1.1x10 <sup>9</sup> Pa (160,000 psi)
Bulk Modulus	3.7x10 <sup>10</sup> Pa (5.3x10 <sup>6</sup> psi)
Rigidity Modulus	3.1x10 <sup>10</sup> Pa (4.5x10 <sup>6</sup> psi)
Young's Modulus	7.2x10 <sup>-10</sup> Pa (10.5x10 <sup>6</sup> psi)

Poisson's Ratio	0.17
Coefficient of Thermal Expansion	$5.5 \times 10^{-7} \text{ cm/cm} \cdot ^\circ\text{C}$ (20°C-320°C)
Thermal Conductivity	1.4 W/m. $^\circ\text{C}$
Specific Heat	670 J/kg. $^\circ\text{C}$
Softening Point	1683°C
Annealing Point	1215°C
Strain Point	1120°C
Electrical Receptivity	$7 \times 10^7 \text{ ohm.cm}$ (350°C)
Dielectric Properties (20°C and 1 MHz)	
Constant	3.75
Strength	$5 \times 10^7 \text{ V/m}$
Loss Factor	Less than $4 \times 10^{-4}$
Dissipation Factor	Less than $1 \times 10^{-4}$
Velocity of Sound-Shear Wave	$3.75 \times 10^3 \text{ m/s}$
Velocity of Sound/Compression Wave	$5.90 \times 10^3 \text{ m/s}$
Sonic Attenuation	Less than 11 db/m MHz
Permeability Constants (cm <sup>3</sup> mm/cm <sup>2</sup> sec cm of Hg)	(700°C)
Helium	$210 \times 10^{-10}$
Hydrogen	$21 \times 10^{-10}$
Deuterium	$17 \times 10^{-10}$
Neon	$9.5 \times 10^{-17}$
Chemical Stability (except hydrofluoric)	High resistance to water and acids